




Sure Seal uses 255 a superior stainless steel for corrosive applications

Sure Seal uses only totally Encapsulated Teflon® valve seats.

Corrosion resistance

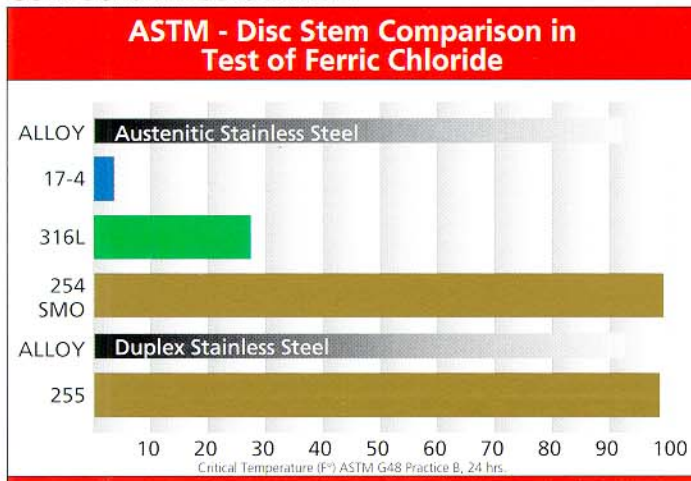

Strength

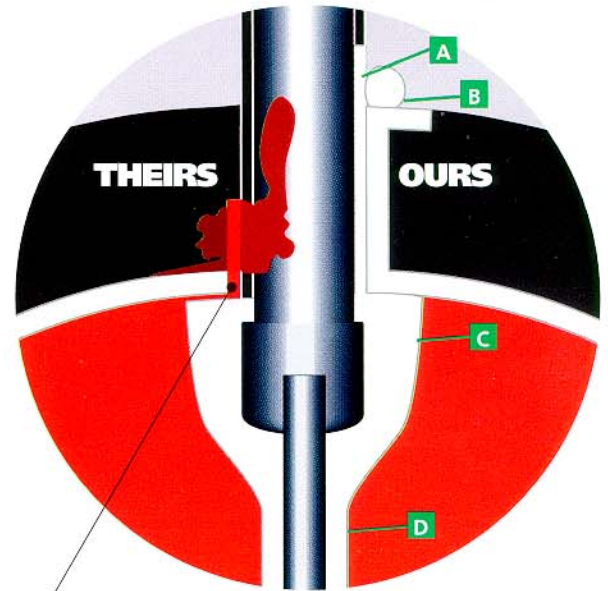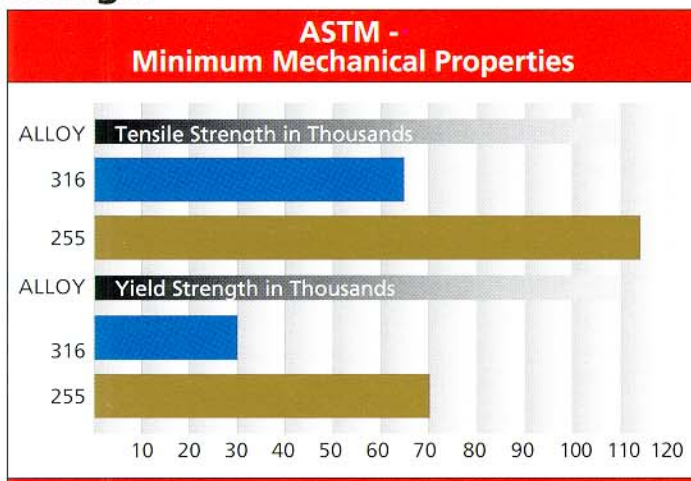

Without Sure Seal's encapsulated design product and/or cleaners can enter into the stem hole and attack the seat and stem.



A. Teflon® Encapsulation extends through stem hole to Teflon® O-Seal top and bottom to assure positive seal to seat and patented O-Seal for total isolation of metal parts.

B. Teflon® lining goes all the way through stem hole to Teflon® O-Seal for total isolation of rubber seat.

C. Total Teflon® and elastomer covering of disc for both chemical resistance and sanitary food processing.

D. Slim disc for maximum flow.

DUPLEX 255 STAINLESS STEEL INVESTMENT CAST VALVES 2" - 12"

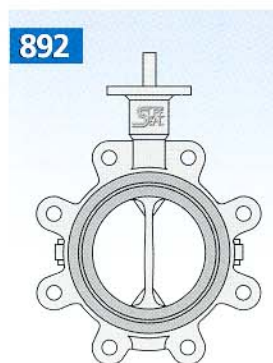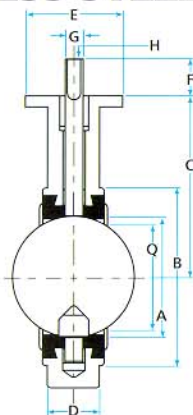

Rt. 2 • Box 2242 • Mineral Point, MO 63660
Your Distributor:



Size	VALVE DIMENSIONS (INCHES)									TOP PLATE DRILLING			WAFER-BOLT CIRCLE AND TAPPED LUG DATA				
	A	B	C	D	E	F	G	H	Q	Bolt Circle	No. Holes	Hole Dia.	Bolt Circle	No. Holes	Tap	Wt.* 899	Lbs.* 892
2	2	37/8	315/16	15/8	31/16	11/4	9/16	3/8	13/8	31/4	4	7/16	43/4	4	5/8-11 UNC	6	7 1/2
3	3	5	47/8	13/4	31/16	11/4	9/16	3/8	29/16	31/4	4	7/16	6	4	5/8-11 UNC	9	11
4	4	6 1/4	6	2	31/16	11/4	5/8	7/16	35/8	31/4	4	7/16	7 1/2	8	5/8-11 UNC	11	17
5	5	7 1/8	6 1/8	2 1/8	31/16	11/4	3/4	1/2	43/4	31/4	4	7/16	8 1/2	8	N/A	15	N/A
6	5 3/4	8 1/4	6 1/2	2 1/8	31/16	11/4	3/4	1/2	5 1/2	31/4	4	7/16	9 1/2	8	3/4-10UNC	17	26
8	7 3/4	10 5/8	8 1/2	2 1/2	49/16	11/4	7/8	5/8	7 1/2	5	4	9/16	11 3/4	8	3/4-10UNC	25	30
10	9 3/4	12 1/2	9 1/8	2 1/2	49/16	2	1 1/8	-	9 13/32	5	4	9/16	14 1/4	12	7/8-9UNC	48	51
12	11 3/4	15 3/8	10 3/4	3	49/16	2	1 1/8	-	11 9/16	5	4	9/16	17	12	7/8-9UNC	65	68